


SOLTEX 2 Slip Membrane

Soltex Slip Membrane is a dense extruded polyethylene sheet for use as a low friction, structural slip membrane.

- Economical & easily installed
- Low coefficient of friction
- Smooth one side & textured reverse
- 2mm thick
- CFC & HCFC free

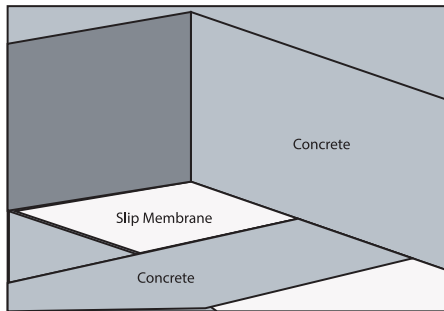

Size and Availability

Full Rolls are 1.2m x 100m

Cut Rolls:

Width	Length	Thickness
100mm	25mt	2mm
200mm	25mt	2mm
300mm	25mt	2mm
400mm	25mt	2mm
500mm	25mt	2mm
600mm	25mt	2mm
700mm	25mt	2mm
800mm	25mt	2mm

Other sizes are available on request

SOLTEX - Sealants / Foams / Fillers

Last Issue Date 07.04.17

Product Description

Soltex 2 Slip Membrane is made from the combination of two layers of dense extruded polyethylene sheet. It is used as a sliding joint between concrete slabs, where load bearing characteristics are present, and low friction resistance is required.

Application

Soltex 2 Slip Membrane is an economical, low capacity, low friction bearing strip, which can be used under in-situ or precast concrete slabs and beams. It is resistant to most chemicals, solvents and weathering.

The bearing strips are formed using two strips, one on top of the other, with the base layer being bonded to the substrate, with Solco Contact Adhesive.

Technical Data

Density	ISO 845	240kg/m ³
Thickness		2mm
Tensile Strength	ISO 1926	
Longitudinal		1500
Transverse		1000
Elongation at Break	ISO1926	
Longitudinal		80
Transverse		70
Compression Strength	ISO 844	
25%		10Kpa
40%		24Kpa
50%		43Kpa
Compression Set	ISO 1856-B	9.5%
Coefficient of Friction		0.15
Maximum Load		0.7N/mm ²

Ancillary Products

Solco Contact Adhesive - 5LT

Complemental Products

Solsheet SAM - Sheet membrane for waterproofing

Soltex 2 & 3 - Filler board for expansion & movement joints